



Hanger Bearings (Style A)

SPECIFICATIONS					
	Nylatron® GS	Commercial Nylon	Nylon 101	UHMW	Wood
Material	Nylatron® GS	Nylon	Nylon 101	Polyethylene	Maple
Construction	Injection Molded	Injection Molded	Injection Molded	Machined	Machined
Color	Gray	Gray	White	White	Brown
Grade	Non FDA	Non FDA	FDA Approved	FDA Approved	Non FDA
Lubricant	Built-in	Built-in	Built-in	Natural	Oil Impregnated
Temp Range	-40°F to +250°F	-60°F to +300°F	-60°F to +300°F	-22°F to +180°F	-50°F to +160°F

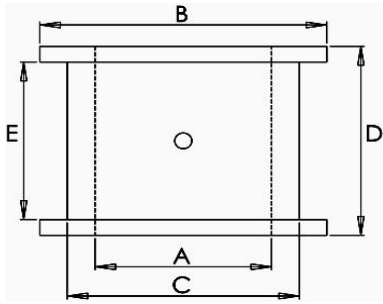

DIMENSIONS					
T.O.P.S. Part Number	Shaft Diameter A	Diameter at Flange B	Diameter at Body C	Overall Width D	Overall Width at Body E
HBNYTA16	1"	1-7/8"	1-1/2"	1-7/16"	1-1/16"
HBNYTA24	1-1/2"	2-1/2"	2-3/16"	1-15/16"	1-9/16"
HBNYTA32	2"	3-1/8"	2-3/4"	1-15/16"	1-9/16"
HBNYTA39	2-7/16"	3-11/16"	3-1/4"	2-15/16"	2-3/8"
HBNYTA48	3"	4-3/8"	4"	2-15/16"	2-3/8"
HBNYTA55	3-7/16"	5-1/2"	4-3/4"	3-3/4"	3-3/16"

WEIGHTS					
Bearing Size	Nylatron® GS	Commercial Nylon	Nylon 101	UHMW	Wood
1"	---	---	---	0.05	0.05
1-1/2"	0.15	0.15	0.15	0.15	0.15
2"	0.25	0.25	0.25	0.20	0.25
2-7/16"	0.45	0.45	0.45	0.40	0.45
3"	0.65	0.65	0.65	0.60	0.65
3-7/16"	1.40	1.40	1.40	1.15	1.40

***Hanger Strap Not Included

Need a distributor in your area? Please contact T.O.P.S. Inc. at 877-326-4704!!



2641 Metro Blvd. Maryland Heights, MO 63043
(Phone) 636-326-4700 (Fax) 314-395-8671 (Online) www.topsinc.us